# calculates. worked time



The 7000E automatically calculates worked time between punches and accumlated totals on the card for up to 50 active employees or jobs. Works with all pay periods, or set to job mode for accurate costing information. Calculates actual or rounded time, and supports an automatic break deduction from daily totals. Automatic print alignment, and auto-sensing of front and back of card eliminates operator mistakes and reduces time required to punch in & out. Prints time in AM/PM, 24 HR or 1/100th of an hour. Automatically adjusts for short months, leap year and daylight savings. Internal lithium battery maintains the time, card totals, and program settings for up to 5 years without power. Optional rechargeable battery keeps unit fully operational for up to 24 hours in case of a power failure.

IDEAL FOR PAYROLL OR JOB COSTING!

## 7000E

TOTALIZING TIME RECORDER





#### **FEATURES**

- Calculates actual or rounded time
- Accumulates total worked hours
- Handles up to 50 active employees or jobs
- Auto-feed and auto-eject of time cards
- Optional automatic break deduction from totals
- Print 12-hour (AM/PM) on 24-hour time
- Print regular minutes (1/60) or 1/100 of hour
- Fully automatic print alignment
- Unlimited punches per day
- Prints day of week or date
- Automatic differentiation of the front and back of a double-sided time card
- Automatic or manual card reset
- Ability to transfer card totals to another card
- Wall or table mount
- Automatic Daylight Savings Time adjustment
- Built-in lithium backup battery for 5 years of data protection
- Optional Ni-Cd battery backup system providing full operation during power failures
- Prints English, Spanish or French

#### **ACCESSORIES**

- Replacement Ribbon Ribbon cartridge, purple fabric
- Time Cards Universal payroll and job costing
- Time Card Rack 7" pockets, 25 or 12 pockets, charcoal
- Rechargeable Battery Ni-Cad battery pack

#### **SPECIFICATIONS**

Dimensions: 6.3"W x 5"D x 8"H

Weight: 3.3 LBS


Power Consumption: 110-120VAC or 220-240,

50/60Hz, 0.2A

Operating Temperature: 23°F to 113°F

Operating Humidity: 20%-80% RH non-condensing

#### SAMPLE TIME CARD

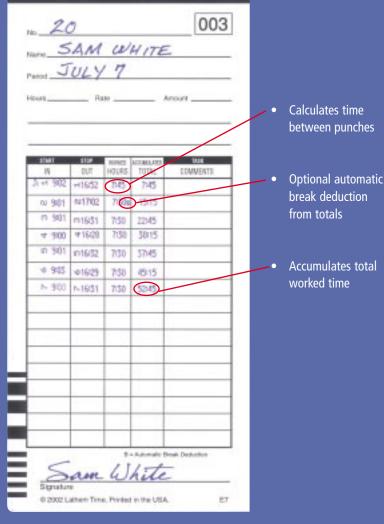

Time cards numbered 1-100

### **BUTTON OPERATION**



- DISABLED: Clock determines punch position.
- OPTIONAL: Employee can override clock logic.
- REQUIRED: Employee must select IN or OUT.



**Lathem Time** • Atlanta, Georgia USA • www.lathem.com

